



EXTREME TEMPERATURE RECIRCULATING CHILLERS

PRODUCT DESCRIPTION


Extreme temperature recirculating chillers are the ideal solution when you need extreme cooling as well as temperature stability. The chiller line offers process fluid temperatures as low as -80°C and as high as 200°C with temperature stability as tight as $\pm 0.5^{\circ}\text{C}$ ($\pm 0.9^{\circ}\text{F}$). The extreme temperature chillers are compatible with a variety of fluids depending on operating temperatures, including HFE-7100, HFE-7500, Baysilone[®] Fluid M 20, and clean water/EGW/PGW.



EXTREME TEMPERATURE RECIRCULATING CHILLER FEATURES

- Offers process fluid temperatures as low as -80°C and as high as 200°C .
- Compatible with a variety of process fluids depending on operating temperatures.
- Dual voltage allows electrical to be easily switched from 60 Hz to 50 Hz.
- Extreme chillers have a temperature stability of $\pm 0.5^{\circ}\text{C}$ or $\pm 1.0^{\circ}\text{C}$.
- High reliability with a 2-year warranty

NOTICE: This information is being provided for reference purposes only. Boyd Corporation and its affiliates reserve the right to modify or update this information from time-to-time without notice. No representation is made as to the accuracy of and no express or implied warranties are provided for the information or products contained in this data sheet, and no liability shall be assumed for the application or use thereof. For additional information, please contact customerservice@boydcorp.com. © 2019 Boyd Corporation All Rights Reserved





EXTREME TEMPERATURE RECIRCULATING CHILLERS


EXTREME TEMPERATURE RECIRCULATING CHILLER TECHNICAL SPECIFICATIONS


Extreme Temperature chiller models for operation at low temperatures (-80°C to 90°C)

EXTREME TEMPERATURE RECIRCULATING CHILLER CONFIGURATION	RC31973G1	RC50106G1	RC50222G1	RC50050G1	RC29246G1
Cooling Capacity	550 W at -80°C	1.5 kW at -80°C	2 kW at -40°C	500 W at -40°C	2.5 kW at -20°C
Compressor Capacity	Magnetically coupled gear pump with VFD and programmable pressure controller		Magnetically coupled turbine pump		
Temperature Stability	±0.5°C (±0.9°F)	±0.5°C (±0.9°F) from -80°C (112°F) to -5°C (23°F) ±3°C (±5.4°F) from -4.9°C (23°F) to 40°C (104°F)	±0.5°C (±0.9°F)		
Fluid Connections	1/2" Swagelok®	Process 1/2" Swagelok® Facility 3/4" FPT	Process 1/2" Swagelok® Facility 3/4" FPT	1/2" FPT	1/2" FPT
Coolant Temperature Range	-85°C to 50°C (-121°F to 122°F)	-80°C to 40°C (-112°F to 104°F) Max. return temp of coolant coming back from process is 60°C (140°F)	-40°C to 85°C (-40°F to 185°F)	-40°C to 90°C (-40°F to 194°F)	-25°C to 90°C (-13°F to 194°F)
Ambient Temperature Range	5°C to 30°C (41°F to 86°F)	5°C to 40°C (41°F to 104°F)		5°C to 35°C (41°F to 95°F)	
Dimensions (WxDxH) mm (in)	508 x 1016 x 1346 (20.0 x 40.0 x 53.0)	508 x 1016 x 1626 (20.0 x 40.0 x 64.0)	490.2 x 736.6 x 1163 (19.3 x 29.0 x 45.8)	703.6 x 487.7 x 934.7 (27.7 x 19.2 x 36.8)	492.8 x 706.1 x 972.8 (19.4 x 27.8 x 38.3)
Electrical (Amps)	208-230 V, 3 phase, 60 Hz or 200-220 V, 3 phase, 50 Hz				
Communication	RS-485	Remote set point and retransmission via 0-10 VDC signal	RS-232	9 pin D-sub RS-232	RS232/485
Process Fluid	HFE-7100		HFE-7500		Clean water (≤1 MΩ-cm)/EGW/PGW
Condenser	Air-Cooled	Water-Cooled	Water-Cooled	Air-Cooled	Air-Cooled
Compliance	Designed to the intent of UL 1995	TUV listed to UL 1995, build to the intent of SEMI S2 and F47	CE Certified and MET Tested to UL 1995		
Facility Water Temp Range	5°C to 35°C (41°F to 95°F)				
Other Features	Heater 1.4 kW at 208V	Self-contained nitrogen purge (8 mm Swagelok® inlet, 3/8" QD outlet) and anti-siphon kit; Custom interface for fluid fill (1/2" QD); Heater 1700 @ at 208V	Heater 2 kW at 240V	Heater and SS pressurized reservoir with fill port and air purge	Heater 4 kW at 240V

NOTICE: This information is being provided for reference purposes only. Boyd Corporation and its affiliates reserve the right to modify or update this information from time-to-time without notice. No representation is made as to the accuracy of and no express or implied warranties are provided for the information or products contained in this data sheet, and no liability shall be assumed for the application or use thereof. For additional information, please contact customerservice@boydcorp.com.

© 2019 Boyd Corporation All Rights Reserved



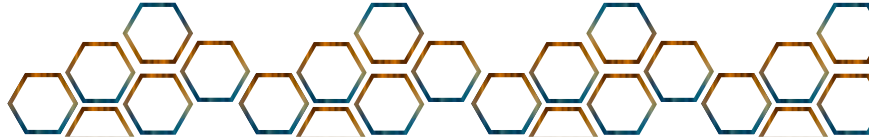

EXTREME TEMPERATURE RECIRCULATING CHILLERS

Extreme Temperature chiller models for high temperature operation (4°C to 200°)

EXTREME TEMPERATURE RECIRCULATING CHILLER CONFIGURATION	RC31526G1	RC50112G1
Cooling Capacity	7 kW at 20°C (68°F)	800 W at 20°C (68°F)
Compressor Capacity	Magnetically coupled turbine pump	
Temperature Stability	±0.5°C (±0.9°F)	±1°C (±1.8°F)
Fluid Connections	1/2" FPT	Process 1/2" Swagelok® Facility 3/4" FPT
Coolant Temperature Range	4°C to 90°C (39°F to 194°F)	10°C to 200°C (50°F to 392°F)
Ambient Temperature Range	5°C to 35°C (41°F to 95°F)	
Dimensions (WxDxH) mm (in)	487.7 x 703.6 x 934.7 (19.2 x 27.7 x 36.8)	490.2 x 490.2 x 1163.0 (19.3 x 19.3 x 45.8)
Electrical (Amps)	208-230 V, 3 phase, 60 Hz or 200-220 V, 3 phase, 50 Hz	
Communication	25 pin D-sub connector with interlock flow, temp, level, and high/low refrigerant	25 pin D-sub connector with interlock flow, temp and level, DeviceNet
Process Fluid	Clean water (≤1 MΩ-cm)/ EGW/PGW	Baysilone® M 20
Condenser	Air-Cooled	Water-Cooled
Compliance	CE Certified and MET tested to UL 1995 and SEMI S2/F47	CE Certified and MET Tested to UL 1995
Facility Water Temperature Range	5°C to 35°C (41°F to 95°F)	
Other Features	Heater 4 kW at 240V	

NOTICE: This information is being provided for reference purposes only. Boyd Corporation and its affiliates reserve the right to modify or update this information from time-to-time without notice. No representation is made as to the accuracy of and no express or implied warranties are provided for the information or products contained in this data sheet, and no liability shall be assumed for the application or use thereof. For additional information, please contact customerservice@boydcorp.com.

© 2019 Boyd Corporation All Rights Reserved

